



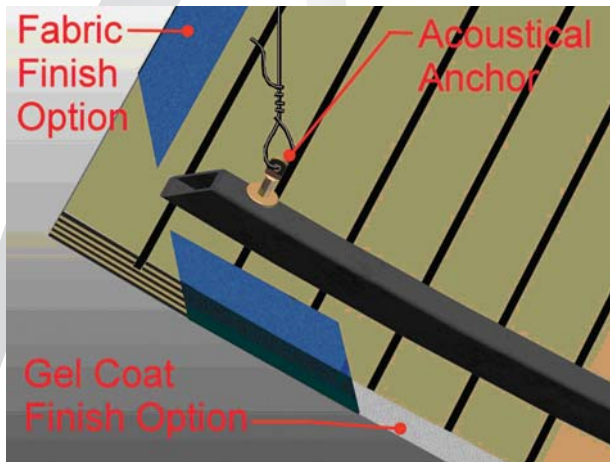

**Wall  
Technology**

CDC Corporation  
An Owens Corning Company

# CURVED REFLECTIVE CEILING CLOUDS

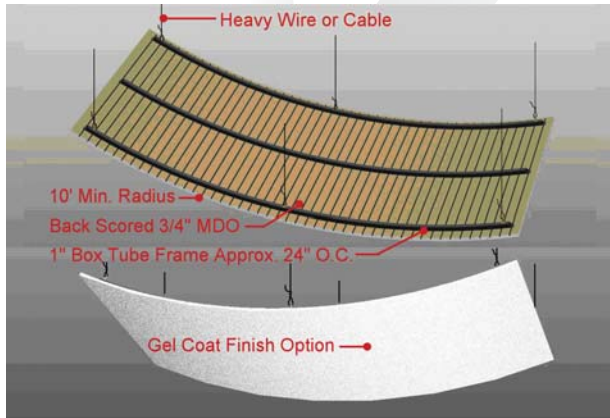

## APPLICATION

Wall Technology Curved Reflective Ceiling Clouds are intended for commercial applications requiring strong design elements combined with acoustical reflection.

## CONSTRUCTION

This curved panel features external metal ribs providing exact curvature for demanding applications, particularly where panels abut. Minimum Radius is 10'. Reflective panels are 3/4" MDO (Medium Density Overlay) plywood. Panels are pre-wrapped with Class A-rated fabric, or can be provided with a gel-coat finish. Panel backs can be painted black, or lined with fiberglass for combined absorption. Finishes are completely adhered to the panel face and returned to the back for a full finished edge. All corners are fully tailored.

## SIZE AVAILABILITY

Standard maximum size is 4'x 10'. Larger sizes are accomplished by ganging panels together. Reflective panels are 3/4".

## EDGE DETAIL

Reflective edges are square. Built up edges (fabric only) are available to hide hardware, 3" maximum. Corners can be radiused.

## FINISHES

A wide variety of fabrics are available from all major brands, including Guilford, Maharam, Knoll, Carnegie, and Designtex. Gel-coat finish is also available on Reflective panels.

## MOUNTING

Standard mounting is direct attachment to the exposed metal frame. Self-drilling acoustical hangers are provided as shown for this purpose. Joining plates for abutting panels are provided for use with our proprietary joining and leveling system.

## EXCELLENT ACOUSTICAL PERFORMANCE

Wall Technology Curved Reflective Ceiling Clouds provide excellent reflection. Use in conjunction with Curved Absorptive Ceiling Clouds or other fine absorptive products if required.

## FIRE PERFORMANCE

Reflective Cloud components, other than the MDO Plywood have been tested according to ASTM E 84\* and have a **Class I/A rating**.



## RECYCLED CONTENT

Wall Technology Curved Reflective Ceiling Clouds can utilize an Owens Corning fiberglass board core that is eligible to bear the Green Cross label for recycled content. The board is certified on average to contain at least 40% recycled glass, with 10% post-consumer and 30% pre-consumer content.

And for your LEED® project, our acoustical panels can help you qualify for recycled content points under the Materials and Resources section. Other LEED® categories may also apply depending upon the project requirements.

## 3-YEAR

### 3-YEAR WARRANTY

Wall Technology Curved Reflective Ceiling Clouds have a limited 3-year warranty. The panels are warranted to be free from defects in material and workmanship for a period of three years from the date of purchase.

See product warranty for details and limitations.

\*The ASTM E 84 standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment, which takes into account all of the factors, which are pertinent to an assessment of the fire hazard of a particular end use. Values are reported to the nearest 5 rating.

# CURVED REFLECTIVE CEILING CLOUDS— SPECIFICATIONS

## PART I GENERAL

- I.1 Work in this section shall be subject to drawings, general conditions, schedules, addenda and other contract documents.
- I.2 The extent of the acoustical panels is shown on the drawings and in the schedules.
- I.3 Submit \_\_\_\_\_ (select quantity) samples of each type of acoustical panel as shown on the drawings and in schedules and include appropriate technical information including test data and maintenance instructions. Submit \_\_\_\_\_ (select quantity) fabric selector cards from manufacturer's standard finishes, or designer specified finishes.
- I.4 Acoustical panels shall be installed according to manufacturer's recommendations and instructions.
- I.5 Installation of acoustical panels shall not begin until all wet work (plastering, concrete, etc.) is completed and dry. Building shall be properly enclosed and under standard occupancy conditions (temperature of 60-85° F and not more than 70% relative humidity) before installation begins.
- I.6 The contractor shall be responsible for the examination and acceptance of all surfaces and conditions prior to the acoustical panel installation.
- I.7 Substitutions or changes will only be permitted by prior approval by the architect.

## PART 2 MATERIALS

- 2.1 2.1 Acoustical ceiling panels shall be Wall Technology Type: Curved Reflective Ceiling Clouds as manufactured by Wall Technology, 800 Gustafson Road, Ladysmith, WI 54848. Phone (800) 359-3312, fax (800) 359-0106.
- 2.2 Acoustical Panels shall be constructed of ¾" MDO (Medium Density Overlay) plywood backed by 1" x 1" pre-curved metal ribs.

- 2.3 Sizes: \_\_\_\_\_ width and \_\_\_\_\_ high or as shown on drawings. Standard maximum size is 48" wide x 96" high (nominal). Custom or larger sizes available; consult manufacturer. Panels are to be manufactured according to field dimensions supplied by the installing contractor. Standard tolerances are  $\pm 1/16$ " in width and length.
- 2.4 Edge profile shall be: Square, radius, full bevel, half-bevel, miter, or custom \_\_\_\_\_ (specify). Corner detail shall be: Square, radius or custom \_\_\_\_\_ (specify).
- 2.5 Panel finish shall be gel-coat or \_\_\_\_\_ (specify finish manufacturer, pattern, color and specifier). Finish shall be applied directly over the face and edges and returned to the back to provide a full finished edge. All corners are fully tailored.
- 2.6 Standard mountings shall be direct attachment to the exposed metal frame with self-drilling acoustical hangers (supplied) or custom \_\_\_\_\_ (specify). Adhesive and miscellaneous fasteners, (i.e. nails, screws, etc are to be supplied by the contractor.
- 2.7 Acoustical Performance – panels shall have a minimum NRC of \_\_\_\_\_ (please specify) in accordance with ASTM C-423 (Type "A" Mounting).
- 2.8 Flammability – All panel components shall have a Class "A" fire rating in accordance with ASTM E-84.

**Thank you for choosing Wall Technology for your acoustical needs.**

*The information provided above is correct to the best of our knowledge at time of printing. We reserve the right to make changes without prior notification.*

### DISCLAIMER OF LIABILITY

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Nothing contained in this bulletin shall be considered a recommendation.



### CDC CORPORATION

800 Gustafson Road  
Ladysmith, Wisconsin 54848

**1-800-359-3312**

**www.walltechnology.com**

Pub. No. 10000536-C. Printed in U.S.A. June 2009. © 2009 Owens Corning.

LEED is a registered trademark of U.S. Green Building Council.